


**Dimensions**

max clear width	-----	4000mm
max clear height	-----	4000mm
max surface area	-----	16m <sup>2</sup>
side room guides	-----	335mm
side room not driven side	-----	335mm
side room drive side	-----	335mm
head room	-----	231mm
head room depth	-----	720mm

**Performance**

opening speed	-----max	3 m/s
closing speed	-----approx	0.5 m/s

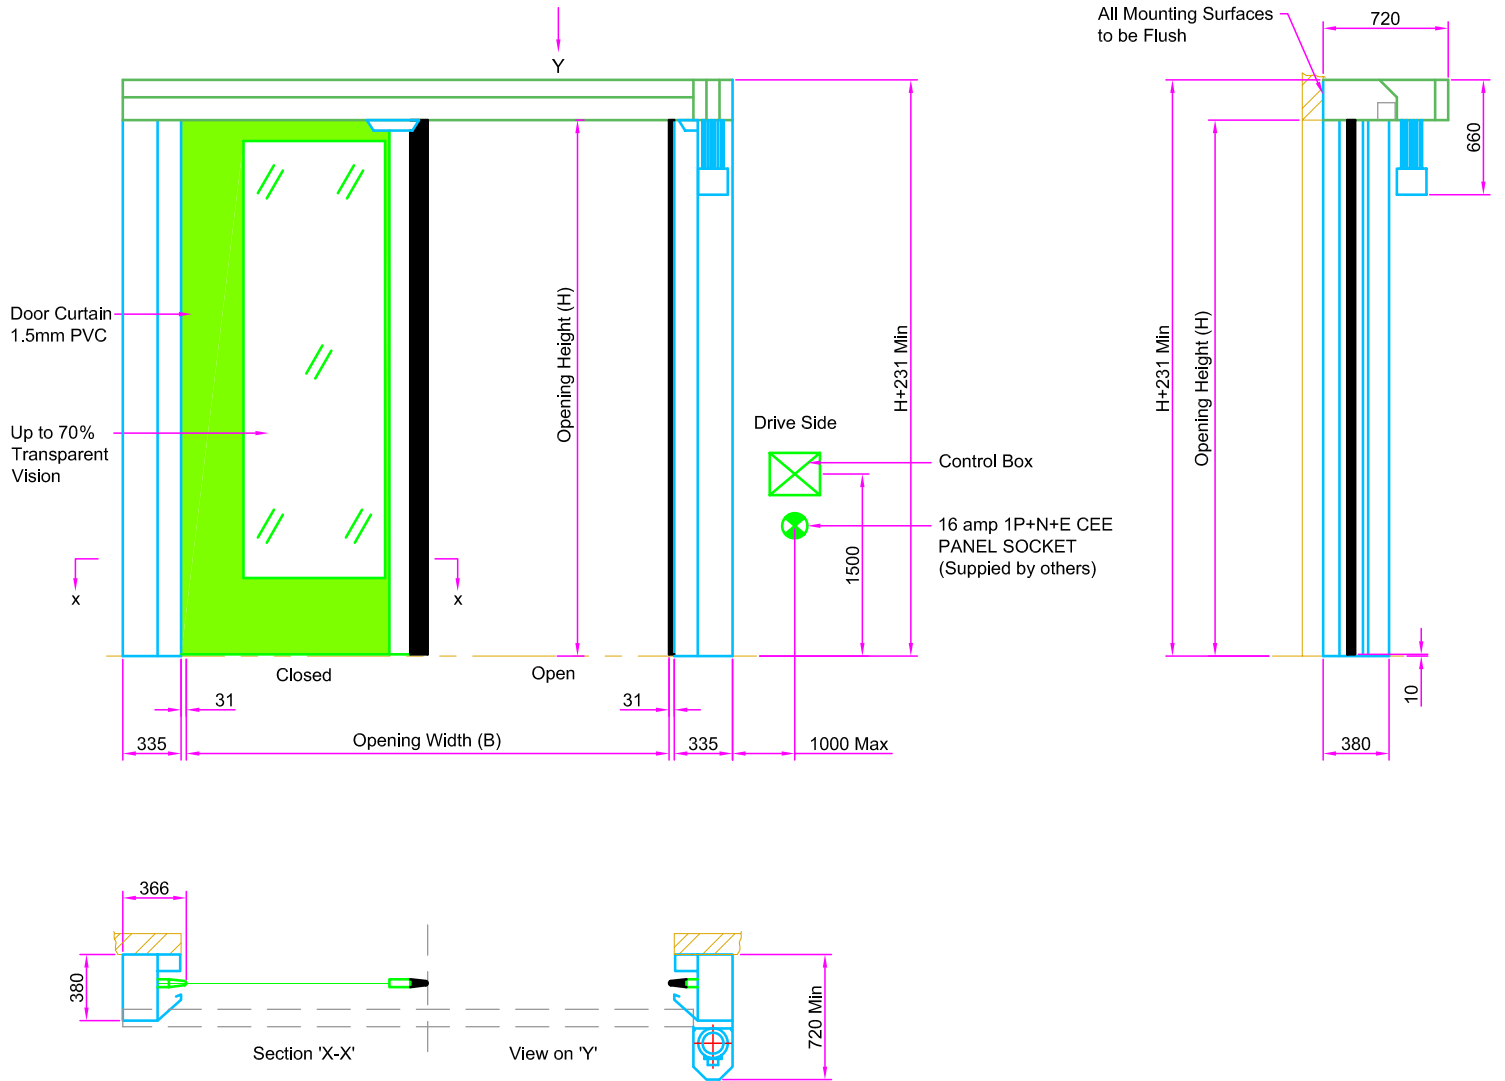


**GUARDIAN**

DOOR SOLUTIONS FOR ALL REQUIREMENTS

45 Progress Rd.  
Leigh on Sea, SS9 5PR  
Tel: +44(0)1702 512424  
Fax: +44(0)1702 260117  
www.guardiandoors.com

UNLESS OTHERWISE INDICATED  
ALL DIMENSIONS IN MILLIMETERS  
AND ALL TOLERANCES ±1.0

DRAWN	CHK'D	APP'D	DATE	SCALE	Drwg No:	ST-LO	ISSUE	DATE	APP'D	
MB			17/11/07	1:30@A3	Guardian maintains a policy of progressive design and we reserve the right to modify specifications without prior notice or alteration to this drawing					
TITLE										
Installation Requirements for 1ph Speed Twin Laterally Opening										

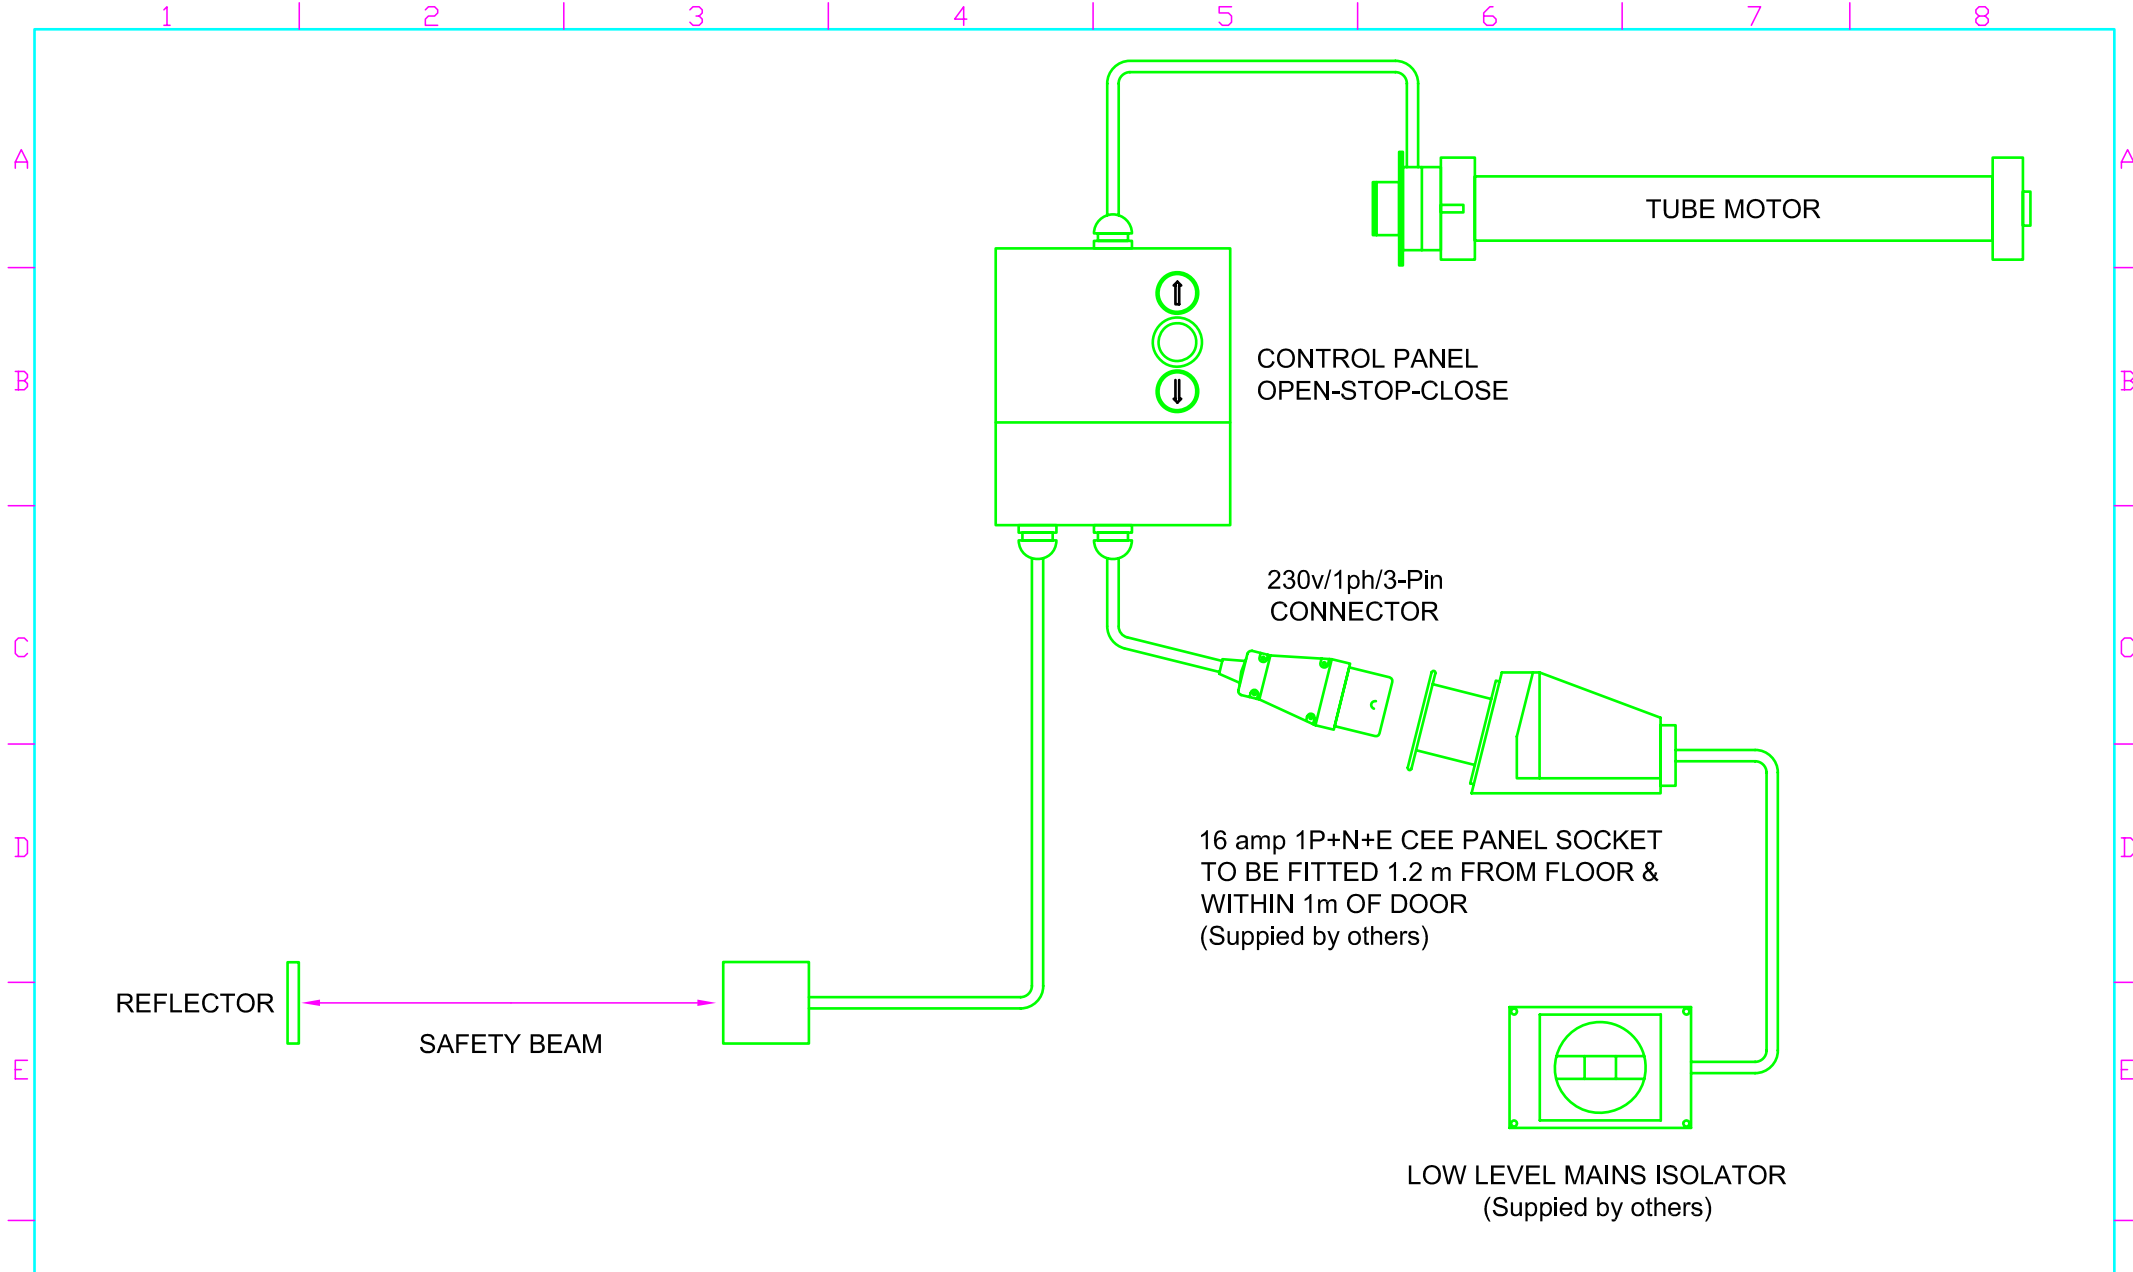

**GUARDIAN**

DOOR SOLUTIONS FOR ALL REQUIREMENTS

45 Progress Rd.  
Leigh on Sea, SS9 5PR  
Tel: +44(0)1702 512424  
Fax: +44(0)1702 260117  
www.guardiandoors.com

UNLESS OTHERWISE INDICATED ALL  
DIMENSIONS IN MILLIMETERS AND ALL  
TOLERANCES  $\pm 1.0$

DRAWN	CHK'D	APP'D	DATE	SCALE	Drwg No:	ISSUE	DATE	APP'D
MB		RWE	23/11/09	NTS	1p-EL-TM-SB			
TITLE					Guardian maintains a policy of progressive design and we reserve the right to modify specifications without prior notice or alteration to this drawing			
ELECTRIC SYSTEM FOR TUBE MOTOR WITH CONTROLLER								
FINISH								

1 2 3 4 5 6 7 8